

21048A-0.6

Version du
 12.06.2020



Compatibilité outil / matière
 Werkzeug / Werkstoffverträglichkeit
 Tool / Material compatibility




ESHOP / EZI CUT

- 1/3
- 2/3
- 3/3

EZI - ALPHA 3

Gruppe Vc [m/min]

ACIERS ALLIÉS ET NON ALLIÉS UNLEGIERTE STÄHLE NON-ALLOYED STEELS	Rm < 450 N/mm ²	1a	160	●
	Rm 450 - 700 N/mm ²	1b	120	●
	Rm 700 - 900 N/mm ²	1c	80	●
	Rm < 1200 N/mm ²	1d	55	●
ACIERS INOX ROSTFREIE STÄHLE STAINLESS STEELS	Rm < 650 N/mm ²	2a	65	●
	Rm 650 - 950 N/mm ²	2b	55	●
	Rm > 950 N/mm ²	2c	40	●
ACIERS TREMPÉS GEHÄRTETE STÄHLE HARDENED STEELS	44 - 56 HRC	3a	30	●
	57 - 67 HRC	3b	20	●
MATÉRIAUX EXOTIQUES EXOTISCHE WERKSTOFFE EXOTIC MATERIALS	< 32 HRC	4a	40	●
	> 32 HRC	4b	20	●
GRAPHITE		5	140	●
FONTES GUSS CAST IRON	< 32 HRC	6a	60	●
	> 32 HRC	6b	50	●
TITANE TITAN	Rm < 800 N/mm ²	7a	55	●
	800 < Rm N/mm ²	7b	40	●
ALLIAGES NICKEL NICKEL NICKEL ALLOYS	Rm < 1000 N/mm ²	8a	30	●
	1000 < Rm N/mm ²	8b	20	●
CUIVRE, LAITON, BRONZE KUPFER, MESSING, BRONZE COPPER, BRASS, BRONZE	Rm < 850 N/mm ²	9a	240	●
	850 < Rm N/mm ²	9b	200	●
ALUMINIUM	Si < 0.5%	10a	255	●
	0.5% < Si < 5%	10b	200	●
	Si > 5%	10c	140	●
MATIÈRES SYNTHÉTIQUES KUNSTSTOFFE SYNTHETIC MATERIALS	Thermoplast	11a		
	Duraplast	11b		
MATIÈRES COMPOSITES FASERVERST. MATERIALIEN COMPOSITE MATERIALS	Fibre de verre	12a	125	●
	Fibre de carbone	12b	95	●
MÉTAUX PRÉCIEUX EDELMETALLE PRECIOUS MATERIALS	Or • Gold	13a	220	●
	Platine	13b	30	●

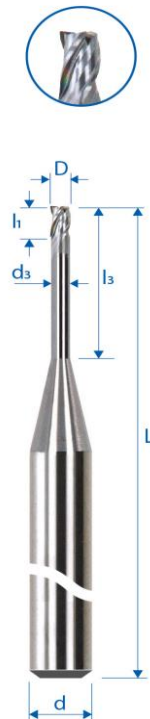

D (0/- 0.01)	0.6
d (h5)	3
L	38
l1	0.9
l3	4.8
d3	0.55
R	
e	
Z	3
Chanfrein	0.015
K	
w° collision	7.2°