

FRAISE Z2 POUR ALUMINIUM
FRÄSER Z2 FÜR ALUMINIUM
ENDMILL Z2 FOR ALUMINIUM

22126H-5-6

Version du
12.06.2020



E2
 $\lambda=40^{\circ}-42^{\circ}$
 $\gamma=18^{\circ}$
 $\varnothing \leq 6$ | $\varnothing > 6$
90° | 45°

 l_1
3 x D
 l_3

 $\lambda 2$
 $\lambda 1$

Compatibilité outil / matière
Werkzeug / Werkstoffverträglichkeit
Tool / Material compatibility





ESHOP / EZI CUT

- 1/3
- 2/3
- 3/3

AL - EZI

Gruppe Vc [m/min]

ACIERS ALLIÉS ET NON ALLIÉS UNLEGIERTE STÄHLE NON-ALLOYED STEELS	Rm < 450 N/mm ²	1a	
	Rm 450 - 700 N/mm ²	1b	
	Rm 700 - 900 N/mm ²	1c	
	Rm < 1200 N/mm ²	1d	
ACIERS INOX ROSTFREIE STÄHLE STAINLESS STEELS	Rm < 650 N/mm ²	2a	
	Rm 650 - 950 N/mm ²	2b	
	Rm > 950 N/mm ²	2c	
ACIERS TREMPÉS GEHÄRTETE STÄHLE HARDENED STEELS	44 - 56 HRC	3a	
	57 - 67 HRC	3b	
MATÉRIAUX EXOTIQUES EXOTISCHE WERKSTOFFE EXOTIC MATERIALS	< 32 HRC	4a	
	> 32 HRC	4b	
GRAPHITE		5	180 ●
FONTES GUSS CAST IRON	< 32 HRC	6a	
	> 32 HRC	6b	
TITANE TITAN	Rm < 800 N/mm ²	7a	
	800 < Rm N/mm ²	7b	
ALLIAGES NICKEL NICKEL NICKEL ALLOYS	Rm < 1000 N/mm ²	8a	
	1000 < Rm N/mm ²	8b	
CUIVRE, LAITON, BRONZE KUPFER, MESSING, BRONZE COPPER, BRASS, BRONZE	Rm < 850 N/mm ²	9a	360 ●
	850 < Rm N/mm ²	9b	320 ●
ALUMINIUM	Si < 0.5%	10a	600 ●
	0.5% < Si < 5%	10b	450 ●
	Si > 5%	10c	250 ●
MATIÈRES SYNTHÉTIQUES KUNSTSTOFFE SYNTHETIC MATERIALS	Thermoplast	11a	210 ●
	Duraplast	11b	150 ●
MATIÈRES COMPOSITES FASERVERST. MATERIALEN COMPOSITE MATERIALS	Fibre de verre	12a	180 ●
	Fibre de carbone	12b	140 ●
MÉTALUX PRÉCIEUX EDELMETALLE PRECIOUS MATERIALS	Or • Gold	13a	360 ●
	Platine	13b	

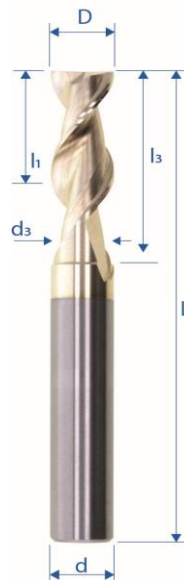

D (h10)	5
d (h6)	6
L	57
l1	10
l3	15
d3	4.60
R	
e	
Z	2
Chanfrein	
K	
w° collision	1.8°