

FRAISE-D'ÉBAUCHE-MD-E2+-EZI-ALPHA+L3-POUR-ACIERS · ROUGHING-ENDMILL-SC-E2+-EZI-ALPHA+L3-FOR-STEEL · SCHAFT-SCHRUPPFRÄSER-HM-E2+-EZI-ALPHA+L3-FÜR-STAHL



SWISS MADE

22134A-4-6

Version 11.09.2026

E2

SUBMICRON GRAIN
GRADE HIGH-
SPEED MACHINING
OF ABRASIVE
MATERIALS

$\lambda = 48^\circ$
 $\gamma = 3^\circ$

HELIX ANGLE 48°
AND CUTTING
ANGLE 3°

0.05-0.15
 45°

CHAMFER AT 45° /
HEIGHT 0.05 TO
0.15 MM



SIDE AND CENTER
CUT

l_1

1.5xD

CUTTING EDGE
LENGTH 1.5xD

l_3

CUTTING LENGTH



FITTING LENGTH
EXTRALONG



IRREGULAR
TOOTHING


MATERIAL COMPATIBILITY

●●● Excellent (3/3) ●●○ Good (2/3) ●○○ Possible (1/3) ○○○ Not recommended

Product material compatibility

CATEGORY	MATERIAL	SPECIFICATION	GRP	22134A-4-6
Alloyed and non-alloyed steels	Non-alloyed steels	Rm < 450 N/mm ²	1a	●●○ 2/3
		Rm 450–700 N/mm ²	1b	●●○ 2/3
		Rm 700–900 N/mm ²	1c	●●○ 2/3
		Rm > 1200 N/mm ²	1d	●●○ 2/3
Stainless steels	Stainless steels	Rm < 650 N/mm ²	2a	●●○ 2/3
		Rm 650–950 N/mm ²	2b	●●○ 2/3
		Rm > 950 N/mm ²	2c	●●○ 2/3
Hardened steels	Hardened steels	44–56 HRC	3a	●●○ 2/3
		57–67 HRC	3b	●○○ 1/3
Exotic materials	Special alloys	< 32 HRC	4a	●●○ 2/3
		> 32 HRC	4b	●●○ 2/3
Graphite	Industrial graphite		5	○○○ 0/3
Cast iron	Grey / nodular cast iron	< 32 HRC	6a	●●○ 2/3
		> 32 HRC	6b	●●○ 2/3
Titanium	Titanium alloys	Rm < 600 N/mm ²	7a	●●○ 2/3
		600 < Rm N/mm ²	7b	●●○ 2/3
Nickel alloys	Inconel, Hastelloy	Rm < 1000 N/mm ²	8a	●●○ 2/3
		Rm > 1000 N/mm ²	8b	●●○ 2/3
Copper, brass, bronze	Copper-based	Rm < 850 N/mm ²	9a	○○○ 0/3
		Rm > 850 N/mm ²	9b	○○○ 0/3
Aluminum	Aluminum alloys	Si < 0.5%	10a	○○○ 0/3
		0.5% < Si < 5%	10b	○○○ 0/3
		Si > 5%	10c	○○○ 0/3
Synthetic materials	Engineering plastics	Thermoplastic	11a	○○○ 0/3
		Thermoset	11b	○○○ 0/3
Composite materials	Reinforced composites	Glass fiber / GFK	12a	○○○ 0/3
		Carbon fiber / KFK	12b	○○○ 0/3
Precious metals	Gold, platinum, silver	Gold	13a	○○○ 0/3
		Platinum	13b	●○○ 1/3

TECHNICAL DRAWING

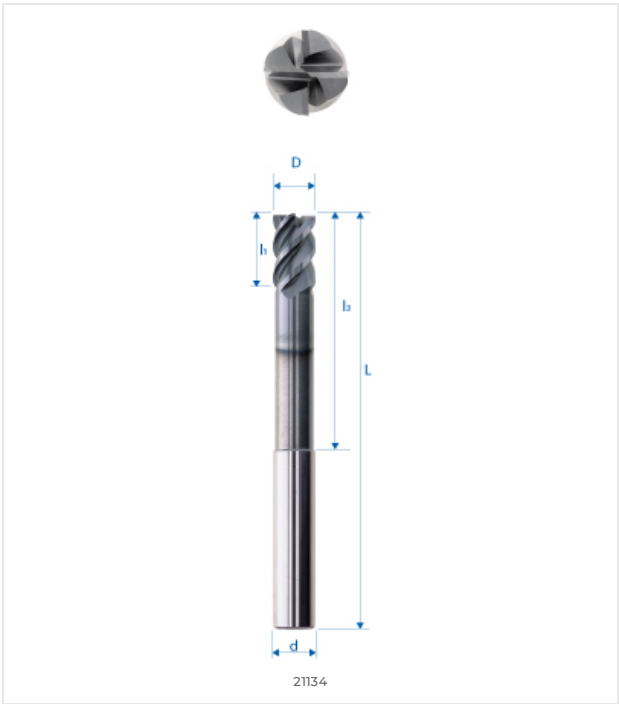

DIMENSIONS

NOMINAL DIMENSIONS	
D (0 / -0.01)	4 mm
d (h5)	6 mm
L	68 mm
lI	6 mm
l3	33 mm
d3	–
R	–
e	–
Z	3
Chamfer K	0.1
w° collision angle	1.6°



E-SHOP / EZI CUT



eskenazi.ch/eshop/22134A-4-6

All rights reserved