

FRAISE-A-CHANFREINER-BI-FACE-90°-Z:3-MD-E25-UF ·
BEVEL-MILLING-CUTTER-BI-FACE-90°-Z:3-CARBIDE-E25-
UF · FASENFRAESER-BI-FACE-90°-Z:3-HM-E25-UF



SWISS MADE

21735-0.85

Version 10.09.2026

E2

SUBMICRON GRAIN GRADE HIGH-SPEED
MACHINING OF ABRASIVE MATERIALS

$\lambda = 0^\circ$
 $\gamma = 8^\circ$

TOOL ANGLES LAMBDA 0° GAMMA 8°



DOUBLE-SIDED 45° CHAMFER CUTTER



SIDE ONLY CUT


MATERIAL COMPATIBILITY

●●● Excellent (3/3) ●●○ Good (2/3) ●○○ Possible (1/3) ○○○ Not recommended

Product material compatibility

CATEGORY	MATERIAL	SPECIFICATION	GRP	21735-0.85
Alloyed and non-alloyed steels	Non-alloyed steels	Rm < 450 N/mm ²	1a	●○○ 1/3
		Rm 450–700 N/mm ²	1b	●○○ 1/3
		Rm 700–900 N/mm ²	1c	●○○ 1/3
		Rm > 1200 N/mm ²	1d	○○○ 0/3
Stainless steels	Stainless steels	Rm < 650 N/mm ²	2a	●○○ 1/3
		Rm 650–950 N/mm ²	2b	●○○ 1/3
		Rm > 950 N/mm ²	2c	○○○ 0/3
Hardened steels	Hardened steels	44–56 HRC	3a	○○○ 0/3
		57–67 HRC	3b	○○○ 0/3
Exotic materials	Special alloys	< 32 HRC	4a	○○○ 0/3
		> 32 HRC	4b	○○○ 0/3
Graphite	Industrial graphite		5	●○○ 1/3
Cast iron	Grey / nodular cast iron	< 32 HRC	6a	○○○ 0/3
		> 32 HRC	6b	○○○ 0/3
Titanium	Titanium alloys	Rm < 600 N/mm ²	7a	●○○ 1/3
		600 < Rm N/mm ²	7b	●○○ 1/3
Nickel alloys	Inconel, Hastelloy	Rm < 1000 N/mm ²	8a	○○○ 0/3
		Rm > 1000 N/mm ²	8b	○○○ 0/3
Copper, brass, bronze	Copper-based	Rm < 850 N/mm ²	9a	●●● 3/3
		Rm > 850 N/mm ²	9b	●●● 3/3
Aluminum	Aluminum alloys	Si < 0.5%	10a	●●● 3/3
		0.5% < Si < 5%	10b	●●● 3/3
		Si > 5%	10c	○○○ 0/3
Synthetic materials	Engineering plastics	Thermoplastic	11a	●●● 3/3
		Thermoset	11b	●●● 3/3
Composite materials	Reinforced composites	Glass fiber / GFK	12a	●○○ 1/3
		Carbon fiber / KFK	12b	●○○ 1/3
Precious metals	Gold, platinum, silver	Gold	13a	●●● 3/3
		Platinum	13b	○○○ 0/3

TECHNICAL DRAWING

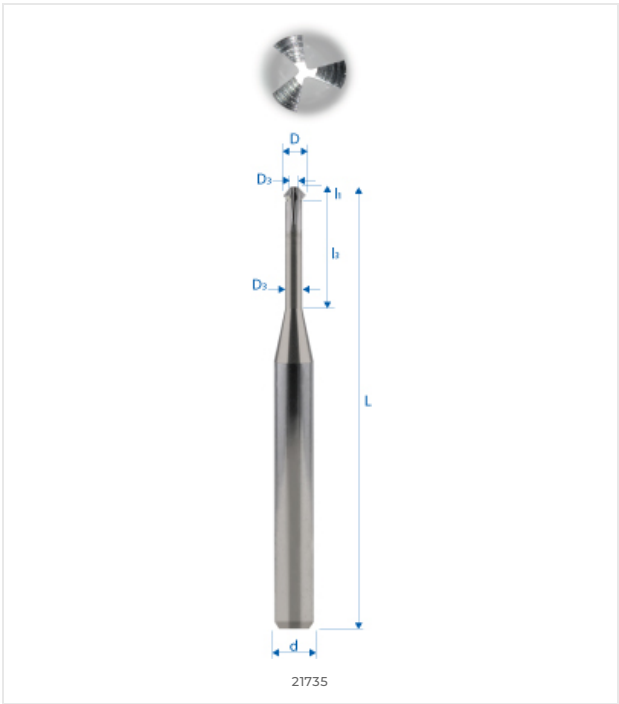

DIMENSIONS

NOMINAL DIMENSIONS	
D (0 / -0.01)	0.85 mm
d (h5)	3 mm
L	38 mm
l1	0.35 mm
l3	1.7 mm
d3	–
R	–
e	–
Z	3
Chamfer K	–
w° collision angle	9.9°



E-SHOP / EZI CUT
eskenazi.ch/eshop/21735-0.85

© 2026 Eskenazi SA — Carouge, Genève
All rights reserved