


FRAISE-À-GRAVER-MD-E25UF · ENGRAVING-ENDMILL-SC-E25UF · GRAVIERSTICHEL-HM-E25UF



21800-0.05-60    Version 11.09.2026



E25  
UF


ULTRAFINE GRADE HIGH-END GRADE WITH VERY HIGH HARDNESS AND TOUGHNESS FOR MICRO-MACHINING

MATERIAL COMPATIBILITY

●●● Excellent (3/3)   ●●○ Good (2/3)   ●○○ Possible (1/3)   ○○○ Not recommended

| Product material compatibility |                          |                    |     |               |
|--------------------------------|--------------------------|--------------------|-----|---------------|
| CATEGORY                       | MATERIAL                 | SPECIFICATION      | GRP | 21800-0.05-60 |
| Alloyed and non-alloyed steels | Non-alloyed steels       | Rm < 450 N/mm²     | 1a  | ○○○ 0/3       |
|                                |                          | Rm 450–700 N/mm²   | 1b  | ○○○ 0/3       |
|                                |                          | Rm 700–900 N/mm²   | 1c  | ○○○ 0/3       |
|                                |                          | Rm > 1200 N/mm²    | 1d  | ○○○ 0/3       |
| Stainless steels               | Stainless steels         | Rm < 650 N/mm²     | 2a  | ○○○ 0/3       |
|                                |                          | Rm 650–950 N/mm²   | 2b  | ○○○ 0/3       |
|                                |                          | Rm > 950 N/mm²     | 2c  | ○○○ 0/3       |
| Hardened steels                | Hardened steels          | 44–56 HRC          | 3a  | ○○○ 0/3       |
|                                |                          | 57–67 HRC          | 3b  | ○○○ 0/3       |
| Exotic materials               | Special alloys           | < 32 HRC           | 4a  | ○○○ 0/3       |
|                                |                          | > 32 HRC           | 4b  | ○○○ 0/3       |
| Graphite                       | Industrial graphite      |                    | 5   | ●○○ 1/3       |
| Cast iron                      | Grey / nodular cast iron | < 32 HRC           | 6a  | ○○○ 0/3       |
|                                |                          | > 32 HRC           | 6b  | ○○○ 0/3       |
| Titanium                       | Titanium alloys          | Rm < 600 N/mm²     | 7a  | ○○○ 0/3       |
|                                |                          | 600 < Rm N/mm²     | 7b  | ○○○ 0/3       |
| Nickel alloys                  | Inconel, Hastelloy       | Rm < 1000 N/mm²    | 8a  | ○○○ 0/3       |
|                                |                          | Rm > 1000 N/mm²    | 8b  | ○○○ 0/3       |
| Copper, brass, bronze          | Copper-based             | Rm < 850 N/mm²     | 9a  | ●●● 3/3       |
|                                |                          | Rm > 850 N/mm²     | 9b  | ●●● 3/3       |
| Aluminum                       | Aluminum alloys          | Si < 0.5%          | 10a | ●●● 3/3       |
|                                |                          | 0.5% < Si < 5%     | 10b | ●●● 3/3       |
|                                |                          | Si > 5%            | 10c | ●○○ 1/3       |
| Synthetic materials            | Engineering plastics     | Thermoplastic      | 11a | ●●● 3/3       |
|                                |                          | Thermoset          | 11b | ●●● 3/3       |
| Composite materials            | Reinforced composites    | Glass fiber / GFK  | 12a | ●○○ 1/3       |
|                                |                          | Carbon fiber / KFK | 12b | ●○○ 1/3       |
| Precious metals                | Gold, platinum, silver   | Gold               | 13a | ●●● 3/3       |
|                                |                          | Platinum           | 13b | ●○○ 1/3       |

TECHNICAL DRAWING

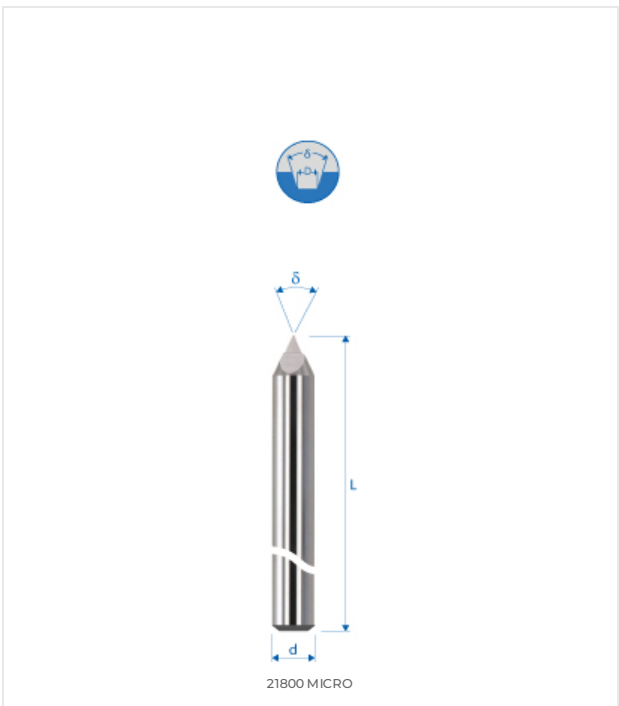

DIMENSIONS

| NOMINAL DIMENSIONS |         |
|--------------------|---------|
| D (0 / -0.01)      | 0.05 mm |
| d (h5)             | 3 mm    |
| L                  | 38 mm   |
| l1                 | 1.2 mm  |
| l3                 | –       |
| d3                 | –       |
| R                  | –       |
| e                  | –       |
| Z                  | 1       |
| Chamfer K          | –       |
| w° collision angle | 11.2°   |



E-SHOP / EZI CUT  
eskenazi.ch/eshop/21800-0.05-60

© 2026 Eskenazi SA — Carouge, Genève  
All rights reserved